

Numatic H3C390S H-Class Cartridge Hazardous Vacuum



NEW

H3C390L/S H-Class

Designed, engineered and built with the tradesman in mind, the H3C390 offers a safe and convenient solution for those whose work brings them into infrequent contact with hazardous dusts and materials.



Equipped with a sealed and disposable HEPA H13 filter cartridge, all dust is safely contained, meaning users can change the filter as and when they need to.



UNPARALLELED Safety

All dust is safely contained within a sealed, H-Class, HEPA13 filter cartridge.

POWERFUL & Efficient

Professional, long-life, 960W motor delivers powerful and efficient results.

BUILT to Last

Made for tough with all-steel power head.

ALL-Terrain

With large rear wheels, the H3C is easy to transport across rough surfaces and up stairs.

COMPACT & Ready

With a compact, 390 container design and folding pull handle (H3C390L only), the H3C can be neatly stored away, ready when you need it.



All-Steel Head
Heavy-duty power head.



H3C Disposable Cartridge
HEPA H13 Filter conforms to EN1822. Fits all H3C machines.



Robust Drum
Tough drum construction with all-terrain large rear wheels for stairs and uneven surfaces.

H3C Cartridge

All dust is safely contained within a sealed, HEPA13 filter cartridge, so you can breathe easy.


BOOK A FREE DEMONSTRATION +618 9249 8744



Easy Lift-out Disposable Cartridge



All-terrain Large Rear Wheels

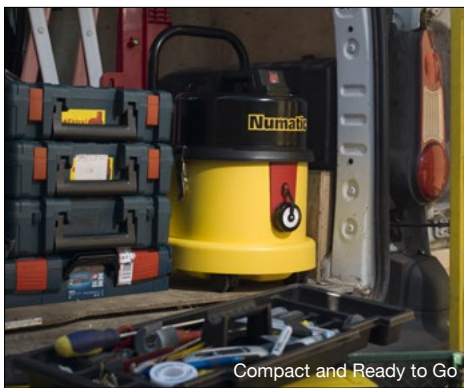

Compact and Ready to Go

H-Class Compliant

H-Class equipment is the legal requirement when working with high-risk, non-explosive, hazardous dusts and materials, including asbestos. The HZC390 is engineered to meet this demanding standard.

Please Note: Local regulations, safety standards and usage instructions must be upheld in order to ensure complete safety of use and fully meet the requirements of working with H-Class dusts and materials. Always seek expert advice and conduct a thorough risk assessment before use.

Model	HZC390S	HZC390L
Motor (W)	1000	1000
Use Type	Dry	Dry
Motor Only Airflow (L/sec)	48	48
Suction H ₂ O (MM)	2500	2500
Capacity (L)	13	13
Filter Type	TriTex	TriTex
Dust Hazard Class	H	H
Filtration Efficiency Classification	H13 (EN1822)	H13 (EN1822)
Power Cord (M)	10	10
Cleaning Range (M)	26.8	26.8
Hose Length (M)	2.4	2.4
Weight (KG)	12.2	13.0
Dimensions WxLxH (MM)	400x450x600	400x450x1010
Kit	AA16	AA16

AA16 909539



601101	2.4m NuFlex Threaded Hose	602159	38 / 32mm Adaptor	601917	280mm Stainless Steel Gulper / Scraper Tool (32mm)
601142	240mm Crevice Tool	601144	65mm Soft Dusting Brush		
602161	152mm Rubber Brush with Soft Bristles	601141	Double Taper Hose / Tool Adaptor		



The Equipment Specialists

P +618 92498744
ABN 53 780 286 266

E info@ccequipment.com.au
W www.ccequipment.com.au

4 Stanford Way Malaga Western Australia 6090
PO Box 2438 Malaga Western Australia 6944