



STEAM SKY

Body material Stainless steel AISI 304 (BA)

Boiler material
Stainless steel AISI 316 L

Boiler volume

Diesel tank

Water tank 35 L

Detergent tank

Diesel consumption 4 L/h

Boiler output 35.000 kcal/h (40 kW)

Energy consumption 450 W

Steam production 916 g/min - 55 Kg/h

Power supply 230 V I~: I2 V DC

183° C

Steam T°

Detergent T°
90° C - 160° C

Weight: 220 Kg

Packaging: 120×80×130 cm

BOOK A FREE DEMONSTRATION +618 9249 8744

INTEGRATED WATER FILTER SYSTEM WITH AUTOMATIC FILTER REGENERATION















APPLICATIONS









Single-phase steam generator with diesel fired boiler, with a stainless-steel body (watertight protection IPX5), unlimited steam autonomy thanks to the automatic refilling system with either an internal water tank (electromechanical water level control system inside the boiler – True TempTM) or directly with a water mains connection. Possibility to inject detergent or hot water together with steam. Fitted with 2 steam connections. The steam generator's front panel is equipped with an electric console with commands for a timer, a thermometer and a pressure gauge; the digital display will advise the user about the necessity to proceed with the boiler maintenance.

OPTIONAL: Inverter for direct connection to a vehicle battery (12V).






+618 9249 8744

TOOLS

GEYSER I 10 BAR



Steam hose

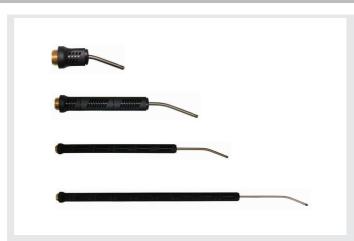

100mm - 400mm - 800mm - 1200mm lances



Stainless steel brushes T50



Flat nozzle 1cm



Rotating tool



Window cleaner w/diffuser - Steam brush w/bristles



Weed killing conveyor









The Equipment Specialists

P +618 92498744 ABN 53 780 286 266 E info@ccequipment.com.au
W www.ccequipment.com.au

4 Stanford Way Malaga Western Australia 6090 PO Box 2438 Malaga Western Australia 6944