


BA 651/751/851



Outstanding combination of modern design and high performance



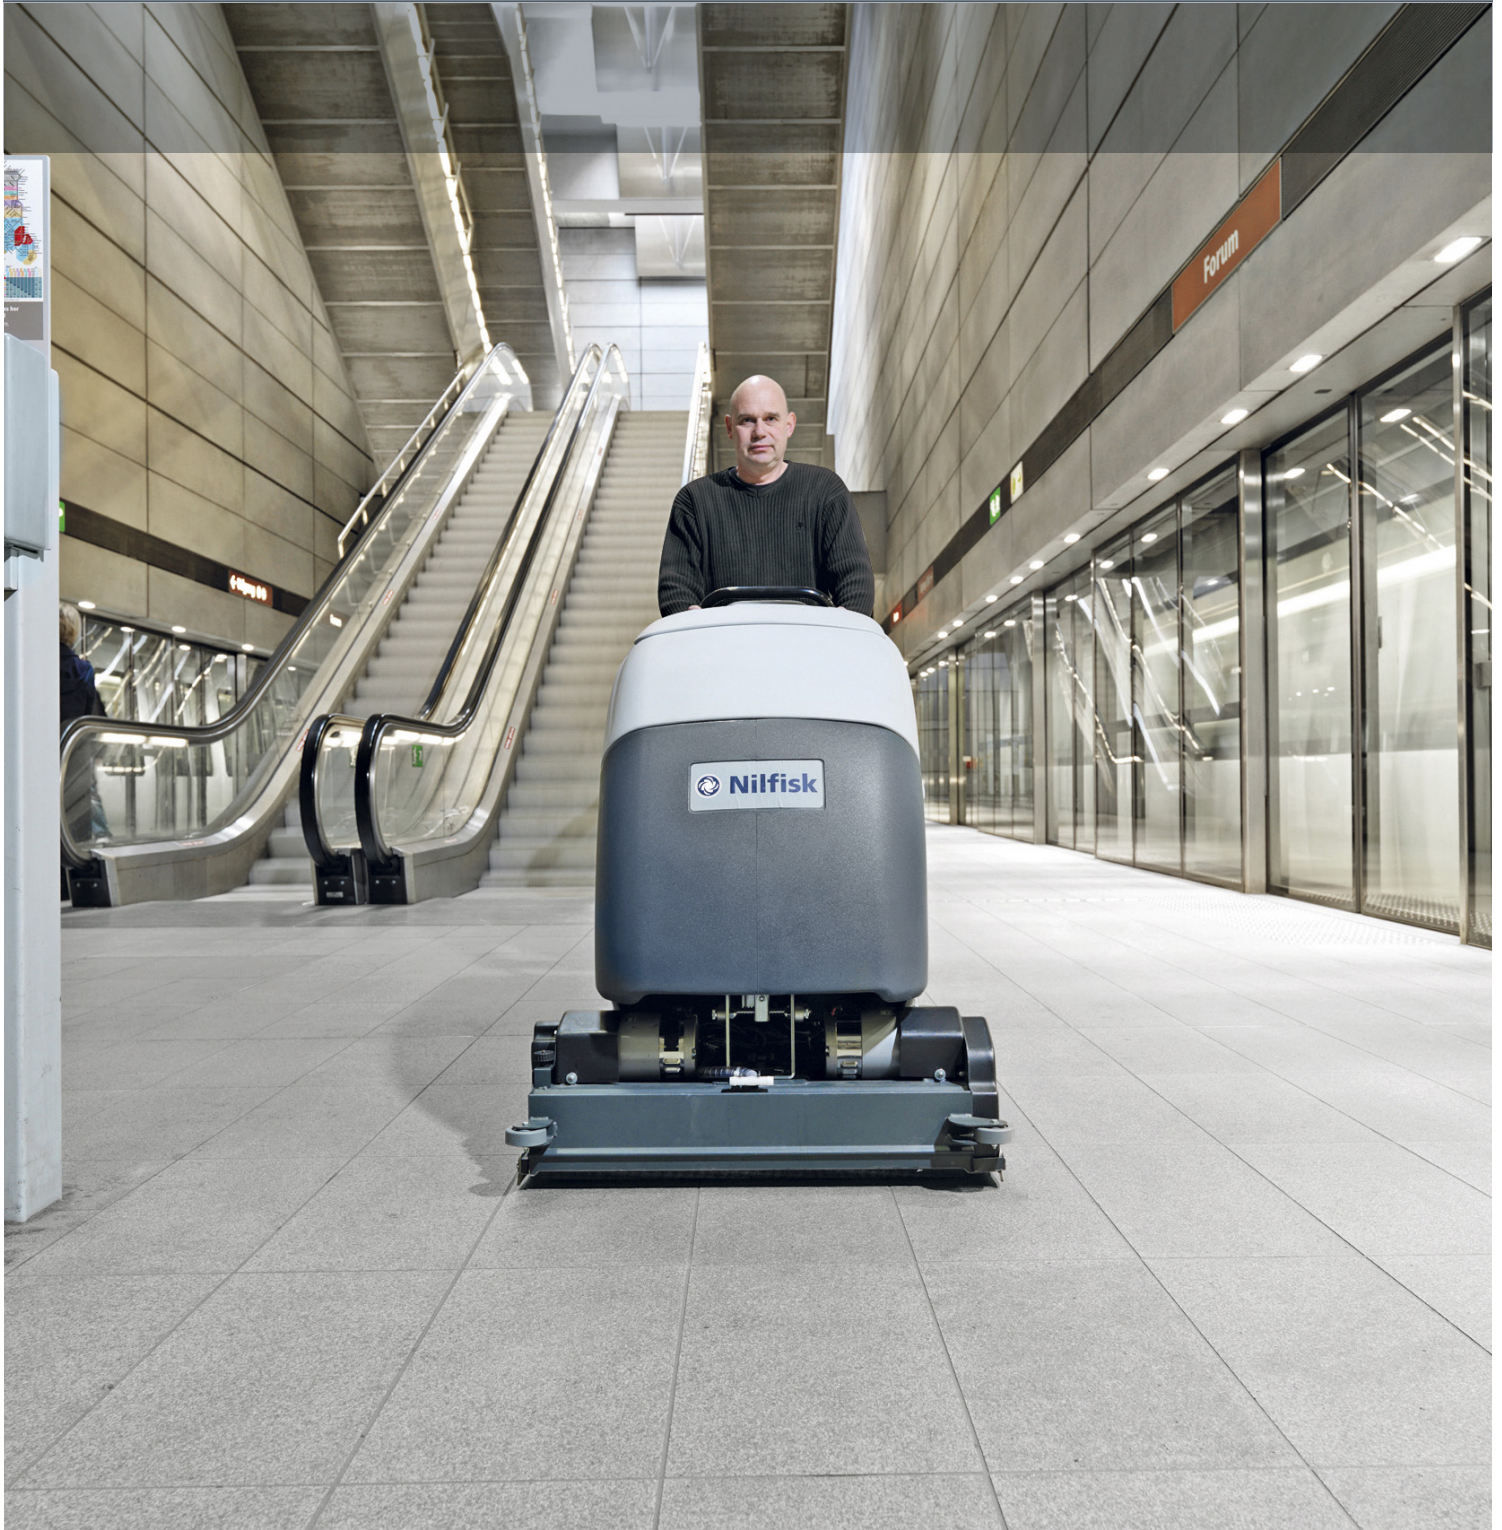

One touch magic just touch and go.
GreenConserves water. The low-flow water, no detergent-mode is ideal for routine cleaning.
Flexible One touch of a button increases performance, adding just enough detergent for dirtier floors. Choose between 5 different levels. One-minute boost Brush pressure: Temporary 60 second power cleaning boost functionality for extra dirty patches.



A generation of scrubber/dryers

Completely renewed control panel,
intuitive and extremely easy to use

More versatility, up to 30% greater productivity, better-than-ever reliability, extremely silent operation, and the most advanced ergonomics available. These are some of the reasons why the BA 651/751/851 series represents a generation of scrubber/dryers, and real added value for cleaning professionals. Furthermore all the machines are now equipped with the Ecoflex system, which keeps the consumption control, but it also guarantees the possibility to boost temporarily water, detergent and brush pressure for all the more aggressive cleaning tasks.

Never before has there been such an outstanding combination of modern ergonomic design, high performance and superb traction. This is the complete walk-behind unit for large area cleaning.

- Extremely low noise level (down to 58 dB(A)) makes daytime cleaning viable
- Superb manoeuvrability allows the machine to turn around in a 200 cm wide aisle
- Powerful traction and easy handling makes cleaning faster and easier
- Combination of 86 cm scrubbing width, 5.6 km/h speed, and large capacity tanks provide better-than-ever productivity
- Sturdy construction, state-of-the art design and better materials offer more reliability and longer working life
- Interchangeable brush decks allow a choice of 3 different disc sizes or 71 cm cylindrical



The exceptional Ecoflex system allows the operator to match the floor cleaning machine's performance to the soil on the floor and the required level of clean. When encountering more soiled areas of the floor, the operator can activate the "burst of power" button for extra cleaning performance, and as easily return to original settings for minimum usage of water, detergent and power. Green meets clean.



ecoflex™

Reliability is also our mantra when it comes to service

A Nilfisk machine functions optimally when cared for by regular service and maintenance visits. Therefore we have created the optimal service solution: three levels of service reflecting different requirements and an optional supply of a substitute machine in critical situations.

Service Solutions Standard – Professional maintenance

Your contract encompasses two yearly maintenance visits and 48 hours response time. Breakdown visits and spare parts are billed separately.

Service Solutions Plus – Optimised performance

With the Plus solution you have a firm grip on your maintenance and repair costs while knowing that your performance is never compromised, only optimised.

Service Solutions Premium – Maximised uptime

If uptime is your absolute top priority and key concern, Service Solutions Premium is the best choice. A quarterly maintenance visit is included, and there are no sudden financial surprises.

→ One touch control panel for easy and safe operation and adjustable handle suits tall or short operators

→ Big area squeegee for excellent moisture pickup is light and easy to clean

→ Squeegee protected by large poly' bumpers

→ Ecoflex system: minimum consumption, maximum performance



← Recovery tank tilts to give access to battery or detergent cartridge without emptying solution tank

← Side filling port far from electronics and motors, for convenience and safety

← Adjustable scrubbing pressure ensures good results on all surfaces

Technical specifications

Description	Unit	BA 651	BA 751	BA 751C	BA 851
Voltage	V	24	24	24	24
Rated power	W	1420	1420	1820	1420
Sound pressure level at 1.5m	dB(A)	58	58	58	58
Productivity rate theoretical/ actual	m ² /h	3700/2200	3980/2390	3980/2390	4820/2895
Scrubbing width	mm	660	710	710	860
Max speed	km/h	5.6	5.6	5.6	5.6
Solution/recovery tank	litre	85/85	85/85	85/85	85/85
Brush/pad diameter	mm	2x330/330	2x355/355	2x690	2x430/432
Brush pressure	kg	32/52	32/52	35	32/52
Brush speed	rpm	220	220	613	220
Squeegee width	mm	890	890	890	1040
Length x width x height	cm	150x60x105	150x60x105	147x60x105	157x60x105
Weight	kg	170	170	170	170
Operating weight	kg	470	470	470	470

Specifications and details are subject to change without prior notice.

CONTACT US

The Experts in Cleaning Equipment



+61 9249 8744

ccequipment.com.au

info@ccequipment.com.au

4 STANFORD WAY, MALAGA WESTERN AUSTRALIA 6090
PO BOX 2438 MALAGA WESTERN AUSTRALIA 6944

ABN: 53 780 286 266